


PPS Battery Specifications



Cell	Connector	Lock	Pad Material	Temperature	L1 Overall Length—mm	L2 Length from Bottom to Shoulder Connector—mm	Product Used In (OD—inches)	Battery Part #
Temperature Rating 85 °C (185 °F)								
AA	Lemo 0B 4 Pin	No	Teflon	85 °C	74.5~75	64.5+0.5	PPS25 (0.75")	01-AC-0012-A0
Two AA	Lemo 0B 4 Pin	No	Teflon	85 °C	131~131.5	121+0.5	PPS25 & PPS28 (0.75")	01-AC-0012-A2
C	Lemo 0B 4 Pin	No	Teflon	85 °C	74.5~75	64.5+0.5	PPS25 (1.25")	01-AC-0012-A1
Temperature Rating 125 °C (257 °F)								
AA	Lemo 0B 4 Pin	No	Teflon	125 °C	74.5~75	64 + 1	PPS25 (0.75")	01-AC-0016-A1
C	Lemo 0B 4 Pin	No	Teflon	125 °C	74.5~75	64.5+0.5	PPS25 (1.25")	01-AC-0016-A0
Temperature Rating 150 °C (302 °F)								
AA	Lemo 0B 4 Pin	No	Teflon	150 °C	74.5~75	64.5+0.5	PPS25 (0.75")	01-AC-0013-A0
Two AA	Lemo 0B 4 Pin	No	Teflon	150 °C	131~131.5	121+0.5	PPS25 & PPS28 (0.75")	01-AC-0013-A1
Three AA	Lemo 0B 4 Pin	No	Teflon	150 °C	190.5~191	180.5+0.5	PPS25 & PPS28 (0.75")	01-AC-0013-A2
C	Lemo 0B 4 Pin	No	Teflon	150 °C	74.5~75	64.5+0.5	PPS25 (1.25")	01-AC-0013-A5
Temperature Rating 150 °C (302 °F)								
C	Lemo 0B 4 Pin	No	Teflon	150 °C	74.5~75	64.5+0.5	PPS25 (1.25")	01-AC-0013-B4
C	Lemo 0B 5 Pin	No	Teflon	150 °C	74.5~75	64.5+0.5	PPS58/Longer PPS25	01-AC-0013-A6

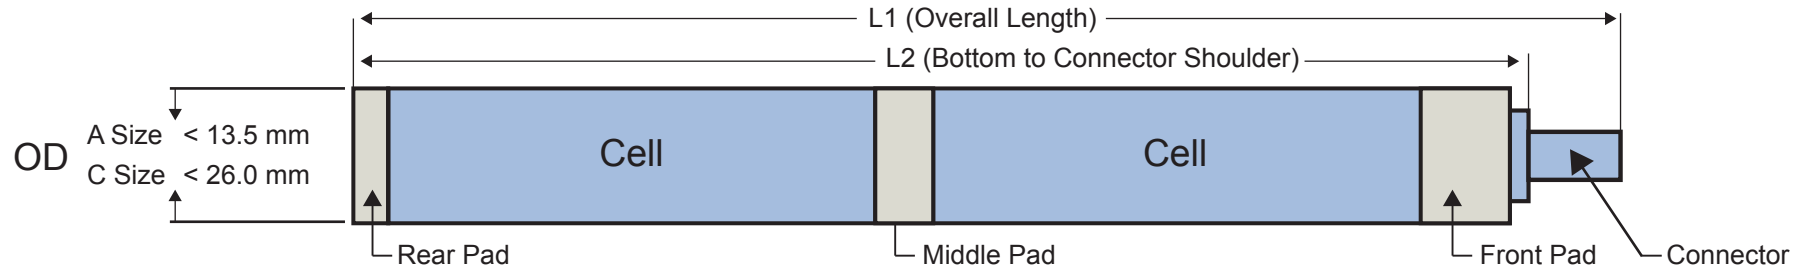

PPS Battery Specifications

Cell	Connector	Lock	Pad Material	Temperature	L1 Overall Length—mm	L2 Length from Bottom to Shoulder Connector—mm	Product Used In (OD—inches)	Battery Part #
CC	Lemo 2B 6 Pin	Yes	Peek	150 °C	149.2~149.7	137.2+0.5	PPS25XM (1.62")/PPS28 (1.27")	01-AC-0013-A4
CC	Lemo 2B 6 Pin	Yes	Teflon	150 °C	149.2~149.7	137.2+0.5	PPS25XM (1.62")/PPS28 (1.27")	01-AC-0013-B2

Temperature Rating 165 °C (329 °F)

AA	Lemo 0B 4 Pin	No	Teflon	165 °C	74.5~75	64.5+0.5	PPS25 (0.75")	01-AC-0014-A7
Two AA	Lemo 0B 4 Pin	No	Teflon	165 °C	131~131.5	121+0.5	PPS25 & PPS28 (0.75")	01-AC-0014-A8
Three AA	Lemo 0B 4 Pin	No	Teflon	165 °C	190.5~191	180.5+0.5	PPS25 & PPS28 (0.75")	01-AC-0014-A9
C	Lemo 0B 5 Pin	No	Teflon	165 °C	74.5~75	64.5+0.5	PPS58/Longer PPS25	01-AC-0014-A6
C	Lemo 0B 4 Pin	No	Teflon	165 °C	74.5~75	64.5+0.5	PPS25 (1.25")	01-AC-0014-A0
CC	Lemo 2B 6 Pin	Yes	Peek	165 °C	149.2~149.7	137.2+0.5	PPS25XM (1.62")/PPS28 (1.27")	01-AC-0014-A5

Temperature Rating 180 °C (356 °F)

AA	Lemo 0B 4 Pin	No	Teflon	180 °C	74.5~75	64.5+0.5	PPS25 (0.75")	01-AC-0015-A0
Two AA	Lemo 0B 4 Pin	No	Teflon	180 °C	131~131.5	121+0.5	PPS25 & PPS28 (0.75")	01-AC-0015-A1
Three AA	Lemo 0B 4 Pin	No	Teflon	180 °C	190.5~191	180.5+0.5	PPS25 & PPS28 (0.75")	01-AC-0015-A8
C	Lemo 0B 5 Pin	No	Teflon	180 °C	74.5~75	64.5+0.5	PPS58/Longer PPS25	01-AC-0015-A7

Temperature Rating 180 °C (356 °F)

C	Lemo 0B 4 Pin	No	Teflon	180 °C	74.5~75	64.5+0.5	PPS25 (1.25")	01-AC-0015-A2
CC	Lemo 2B 6 Pin	Yes	Peek	180 °C	149.2~149.7	137.2+0.5	PPS25XM (1.62")/PPS28 (1.27")	01-AC-0015-A6

Temperature Rating 200 °C (392 °F)

Three AA	Lemo 0B 4 Pin	No	Peek	200 °C		181-1	PPS25 & PPS28 (0.75")	01-AC-0011-A0
CC	Lemo 2B 6 Pin	Yes	Peek	200 °C	149.2~149.7	137.2+0.5	PPS25XM (1.62")/PPS28 (1.27")	01-AC-0011-A2

